



RNC



- 
- ↘ RNC 270
 - ↘ RNC 520
 - ↘ RNC 770
 - ↘ RNC 1020
 - ↘ RNC 2020

- ↘ RNC Slim 270
- ↘ RNC Slim 520
- ↘ RNC Slim 770
- ↘ RNC Slim 1020
- ↘ RNC Slim 2020

RNC

Installazione
Installation
Installation

Incasso terra
Ground recess
Encastrement au sol

Materiali
Materials
Materiels

Materiale Corpo: PMMA | Tipo di diffusore: PMMA
Material: PMMA | Diffuser type: PMMA
Matériel du corps: PMMA | Type de diffuseur: PMMA

Alimentazione
Power supply
Alimentation

24V

Versioni
Versions
Versions

Cavo Alimentazione: 1 metro H05RN-F
Power cable: 1 m H05RN-F
Câble d'alimentation: 1 m H05RN-F



RNC
270



RNC
520



RNC
770



RNC
1020



RNC
2020



COLOURS



Neutro
Neutral
Neutre

RNC 270

IP67 IK10 20J xx9 <small>CE UK CA 10 2000 KG MAX 35°C MAX</small>	LED					
	W	LM	REAL LM	COL.	CODE *	
	2,5	300	75	24V	LL138000	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC 520

IP67 IK10 20J xx9 <small>CE UK CA 10 2000 KG MAX 35°C MAX</small>	LED					
	W	LM	REAL LM	COL.	CODE *	
	5	600	155	24V	LL138001	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC 770

IP67 IK10 20J xx9 <small>CE UK CA 10 2000 KG MAX 35°C MAX</small>	LED					
	W	LM	REAL LM	COL.	CODE *	
	7,5	900	220	24V	LL138002	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC 1020

IP67 IK10 20J xx9 <small>CE UK CA 10 2000 KG MAX 35°C MAX</small>	LED					
	W	LM	REAL LM	COL.	CODE *	
	10	1200	300	24V	LL138003	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC 2020

IP67 IK10 20J xx9 <small>CE UK CA 10 2000 KG MAX 35°C MAX</small>	LED					
	W	LM	REAL LM	COL.	CODE *	
	20	2400	590	24V	LL138004	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Chiavi di rimozione RNC

Chiavi per rimozione apparecchio.

RNC removal keys

Keys for device removal

CoL.	Code
-	LB1380000



Clés de retrait RNC

Clés pour retirer l'appareil.


Armatura da incasso RNC 270

Armatura da incasso in alluminio.

Recess box RNC 270

Aluminium recessed box.

CoL.	Code
-	LB1380001



Armature à encastrer RNC 270

Armature à encastrer en aluminium.


Armatura da incasso RNC 520

Armatura da incasso in alluminio.

Recess box RNC 520

Aluminium recessed box.

CoL.	Code
-	LB1380002

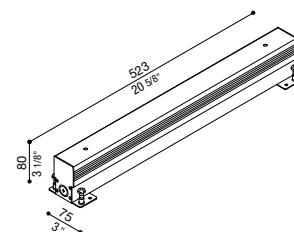

Armature à encastrer RNC 520

Armature à encastrer en aluminium.


Armatura da incasso RNC 770

Armatura da incasso in alluminio.

Recess box RNC 770

Aluminium recessed box.

CoL.	Code
-	LB1380003

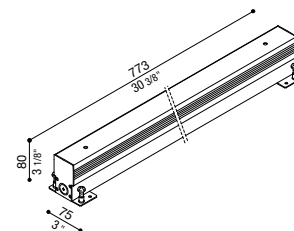

Armature à encastrer RNC 770

Armature à encastrer en aluminium.


Armatura da incasso RNC 1020

Armatura da incasso in alluminio.

Recess box RNC 1020

Aluminium recessed box.

CoL.	Code
-	LB1380004

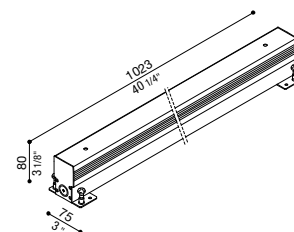

Armature à encastrer RNC 1020

Armature à encastrer en aluminium.


Armatura da incasso RNC 2020

Armatura da incasso in alluminio.

Recess box RNC 1020

Aluminium recessed box.

CoL.	Code
-	LB1380009

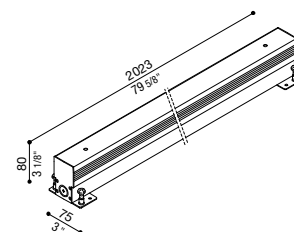

Armature à encastrer RNC 1020

Armature à encastrer en aluminium.

Alimentatore 24V in tensione costante RNC

24V constant
voltage driver
RNC

Alimentation à
tension constante
de 24V RNC

RNC 270 / RNC Slim 270

N° max	IP	Code
1/8	20	LB1070029
1/12	20	LB1070030
1/8	67	LB1070031
1/16	67	LB1070032
1/6 DALI	20	LB1070065

RNC 520 / RNC Slim 520

N° max	IP	Code
1/4	20	LB1070029
1/7	20	LB1070030
1/4	67	LB1070031
1/8	67	LB1070032
1/3 DALI	20	LB1070065

RNC 770 / RNC Slim 770



N° max	IP	Code
1/2	20	LB1070029
1/4	20	LB1070030
1/2	67	LB1070031
1/5	67	LB1070032
1/2 DALI	20	LB1070065

RNC 1020 / RNC Slim 1020

N° max	IP	Code
1/2	20	LB1070030
1/4	67	LB1070032
1 DALI	20	LB1070065

RNC 2020 / RNC Slim 2020

N° max	IP	Code
1	20	LB1070030
1/2	67	LB1070032

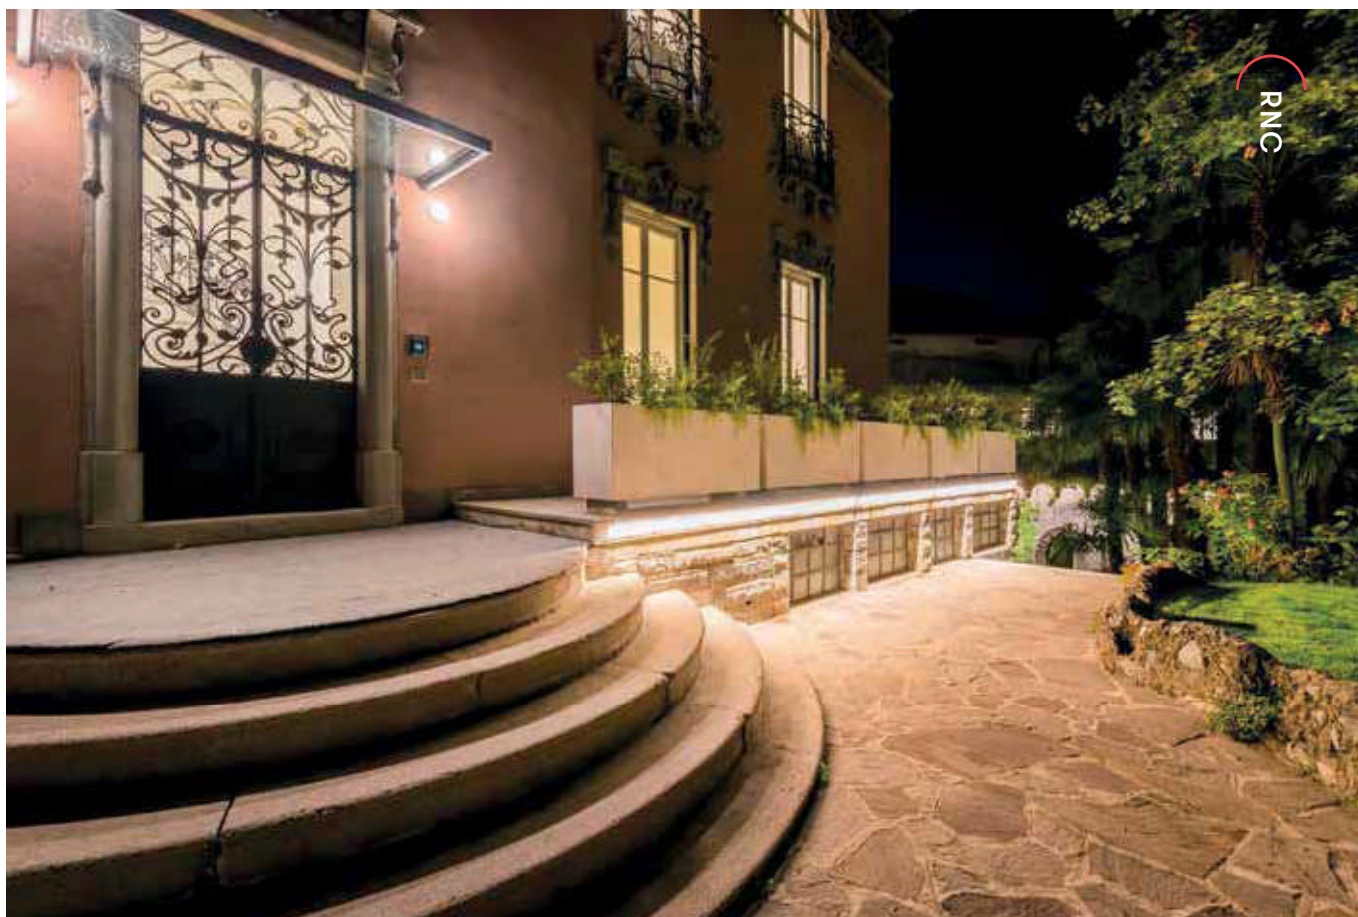

RNC SLIM

Installazione

Installation
Installation

Incasso terra

Ground recess
Encastrement au sol

Materiali

Materials
Materiels

Materiale Corpo: PMMA | Tipo di diffusore: PMMA

Material: PMMA | Diffuser type: PMMA
Matériel du corps: PMMA | Type de diffuseur: PMMA

Alimentazione

Power supply
Alimentation



24V

Versioni

Versions
Versions

Cavo Alimentazione: 1 metro H05RN-F

Power cable: 1 m H05RN-F
Câble d'alimentation: 1 m H05RN-F

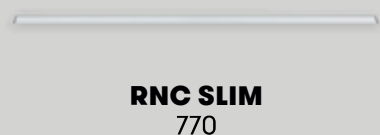

COLOURS



Neuro
Neutral
Neutre

RNC Slim 270

IP67 IK10 20J xx9 <small>CE UK CA 10 2000 KG MAX 35°C MAX</small>	LED					
	W	LM	REAL LM	COL.	CODE *	
	2,5	300	65	24V	LL138100	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC Slim 520

IP67 IK10 20J xx9 <small>CE UK CA 10 2000 KG MAX 35°C MAX</small>	LED					
	W	LM	REAL LM	COL.	CODE *	
	5	600	125	24V	LL138101	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC Slim 770

IP67 IK10 20J xx9 <small>CE UK CA 10 2000 KG MAX 35°C MAX</small>	LED					
	W	LM	REAL LM	COL.	CODE *	
	7,5	900	200	24V	LL138102	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC Slim 1020

IP67 IK10 20J xx9 <small>CE UK CA 10 2000 KG MAX 35°C MAX</small>	LED					
	W	LM	REAL LM	COL.	CODE *	
	10	1200	280	24V	LL138103	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC Slim 2020

IP67 IK10 20J xx9 <small>CE UK CA 10 2000 KG MAX 35°C MAX</small>	LED					
	W	LM	REAL LM	COL.	CODE *	
	20	2400	550	24V	LL138104	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K


Chiavi di rimozione RNC

Chiavi per rimozione apparecchio.

RNC removal keys

Keys for device removal

CoL.	Code
-	LB1380000



Clés de retrait RNC

Clés pour retirer l'appareil.


Armatura da incasso RNC Slim 270

Armatura da incasso in alluminio.

Recess box RNC Slim 270

Aluminium recessed box.

CoL.	Code
-	LB1380005



Armature à encastrer RNC Slim 270


Armature à encastrer en aluminium.

Armatura da incasso RNC Slim 520

Recess box RNC Slim 520

Aluminium recessed box.

CoL.	Code
-	LB1380006

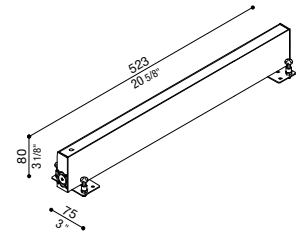

Armature à encastrer RNC Slim 520

Armature à encastrer en aluminium.


Armatura da incasso RNC Slim 770

Armatura da incasso in alluminio.

Recess box RNC Slim 770

Aluminium recessed box.

CoL.	Code
-	LB1380007

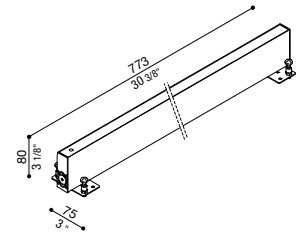

Armature à encastrer RNC Slim 770

Armature à encastrer en aluminium.


Armatura da incasso RNC Slim 1020

Armatura da incasso in alluminio.

Recess box RNC Slim 1020

Aluminium recessed box.

CoL.	Code
-	LB1380008



Armature à encastrer RNC Slim 1020

Armature à encastrer en aluminium.


Armatura da incasso RNC Slim 2020

Armatura da incasso in alluminio.

Recess box RNC Slim 2020

Aluminium recessed box.

CoL.	Code
-	LB1380010

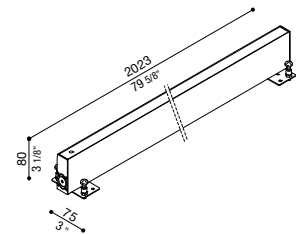

Armature à encastrer RNC Slim 2020

Armature à encastrer en aluminium.

Alimentatore 24V in tensione costante RNC

24V constant
voltage driver
RNC

Alimentation
à tension
constante de
24V RNC

RNC 270 / RNC Slim 270

N° max	IP	Code
1/8	20	LB1070029
1/12	20	LB1070030
1/8	67	LB1070031
1/16	67	LB1070032
1/6 DALI	20	LB1070065

RNC 520 / RNC Slim 520

N° max	IP	Code
1/4	20	LB1070029
1/7	20	LB1070030
1/4	67	LB1070031
1/8	67	LB1070032
1/3 DALI	20	LB1070065

RNC 770 / RNC Slim 770


N° max	IP	Code
1/2	20	LB1070029
1/4	20	LB1070030
1/2	67	LB1070031
1/5	67	LB1070032
1/2 DALI	20	LB1070065

RNC 1020 / RNC Slim 1020

N° max	IP	Code
1/2	20	LB1070030
1/4	67	LB1070032
1 DALI	20	LB1070065

RNC 2020 / RNC Slim 2020

N° max	IP	Code
1	20	LB1070030
1/2	67	LB1070032





FEATURES

Rimozione RNC con apposite chiavi (non incluse).

Remove RNC with special keys (not included).

Enlèvement du RNC avec des clés spéciales (non incluses).




RNC



RNC SLIM





A large window with a grid pattern reflecting the night sky and interior lights, set above a brick wall. The window is divided into a 4x10 grid of panes. The reflection shows a dark sky with some lights and the interior of a building with lights. Below the window is a brick wall with a rough, textured surface. A thin horizontal light strip is visible at the bottom of the image.

RNC SLIM 1020



RNC 770



RNC 520