

Lombardo.
EVERYDAY LIGHT



CLIC



Lombardo.
EVERYDAY LIGHT



CEILING

WALL

CLIC

The range

-  **Led** light
-  **GU10** light
-  **Indoor**
-  **Outdoor**



GROUND / FLOOR

CLIC | WALL & TOP

Parete, soffitto

Parete, soffitto.
Ground, ceiling.
Mur, plafond.

Materiali
Materials
Materiels

Corpo in policarbonato, diffusore in policarbonato.
Polycarbonate body, polycarbonate diffuser.
Corps en polycarbonate, diffuseur en polycarbonate.

Alimentazione
Power supply
Alimentation

LED AC-Direct, lampadina GU10 (non inclusa).
LED AC-Direct, GU10 light bulb (not included).
LED AC-Direct, ampoule GU10 (pas inclus).

Versioni
Versions
Versions

Dimmerabile a taglio di fase.
Phase cut dimmable.
Réglable coupe de phase.



CLIC WALL



CLIC UP WALL



CLIC TOP



CLIC UP TOP



Bianco RAL 9003
White RAL 9003
Blanc RAL 9003



Nero RAL 9005
Black RAL 9005
Noir RAL 9005



Light Grey RAL 7044
Light Grey RAL 7044
Gris Pale RAL 7044



Dark Grey RAL 7021
Dark Grey RAL 7021
Gris Foncé RAL 7021



Verde RAL 6003
Green RAL 6003
Vert RAL 6003




Terracotta
Terracotta
Terre cuite

COLOURS

CLIC WALL


		LED				
IP 65 IK 06 1J xx3		W	LM	REAL LM	COL.	CODE *
CE UK CA	5	600	362	AC DIRECT		LL14802B <input type="checkbox"/>
						LL14802W <input type="checkbox"/>
						LL14802L <input type="checkbox"/>
						LL14802D <input type="checkbox"/>
						LL14802V <input type="checkbox"/>
						LL14802T <input type="checkbox"/>
		LAMP				
GU10		ATT	LAMP MAX	CFL	COL.	CODE *
			1 x 7 (LED)			LU14802B
						LU14802W
						LU14802L



* Complete the CODE LED COLOUR N | 4000 K 2 | 2700 K - lm -5% 3 | 3000 K - lm -5%

CLIC UP WALL

		LED				
IP 65 IK 06 1J xx3		W	LM	REAL LM	COL.	CODE *
CE UK CA	5	600	330	AC DIRECT		LL14812B <input type="checkbox"/>
						LL14812W <input type="checkbox"/>
						LL14812L <input type="checkbox"/>
						LL14812D <input type="checkbox"/>
						LL14812V <input type="checkbox"/>
						LL14812T <input type="checkbox"/>
		LAMP				
GU10		ATT	LAMP MAX	CFL	COL.	CODE *
			1 x 7 (LED)			LU14812B
						LU14812W
						LU14812L



* Complete the CODE LED COLOUR N | 4000 K 2 | 2700 K - lm -5% 3 | 3000 K - lm -5%



CLIC UP WALL















CLIC UP WALL



CLIC WALL












CLIC TOP


IP 65 IK 06 1J xx3		LED							
W	LM	REAL LM	COL.	CODE	*				
5	600	362	 AC DIRECT	 LL14801B	<input type="checkbox"/>				
				 LL14801W	<input type="checkbox"/>				
				 LL14801L	<input type="checkbox"/>				
				 LL14801D	<input type="checkbox"/>				
				 LL14801V	<input type="checkbox"/>				
				 LL14801T	<input type="checkbox"/>				
LAMP									
ATT	LAMP MAX	CFL	COL.	CODE	*				
GU10	1 x 7 (LED)		 LU14801B						
			 LU14801W						
			 LU14801L						



* Complete the CODE LED COLOUR N | 4000 K 2 | 2700 K - lm -5% 3 | 3000 K - lm -5%


CLIC UP TOP

IP 65 IK 06 1J xx3		LED							
W	LM	REAL LM	COL.	CODE	*				
5	600	330	 AC DIRECT	 LL14811B	<input type="checkbox"/>				
				 LL14811W	<input type="checkbox"/>				
				 LL14811L	<input type="checkbox"/>				
				 LL14811D	<input type="checkbox"/>				
				 LL14811V	<input type="checkbox"/>				
				 LL14811T	<input type="checkbox"/>				
LAMP									
ATT	LAMP MAX	CFL	COL.	CODE	*				
GU10	1 x 7 (LED)		 LU14811B						
			 LU14811W						
			 LU14811L						



* Complete the CODE LED COLOUR N | 4000 K 2 | 2700 K - lm -5% 3 | 3000 K - lm -5%

CLIC TOP

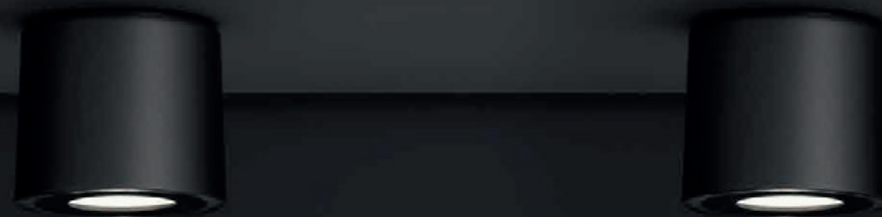

CLIC | GARDEN & POST

Installazione
Installation
Installation
Terra, palo Ø60mm, palo Ø40mm.
Ground, Ø60mm pole, Ø40mm pole.
Sol, poteau Ø60mm, poteau Ø40mm.

Materiali
Materials
Materiels
Corpo in policarbonato, diffusore in policarbonato.
Polycarbonate body, polycarbonate diffuser.
Corps en polycarbonate, diffuseur en polycarbonate.

Alimentazione
Power supply
Alimentation
LED AC-Direct, lampadina GU10 (non inclusa).
LED AC-Direct, GU10 light bulb (not included).
LED AC-Direct, ampoule GU10 (pas inclus).

Versioni
Versions
Versions
Dimmerabile a taglio di fase.
Phase cut dimmable.
Réglable coupe de phase.



**CLIC
GARDEN**



**CLIC
UP GARDEN**



**CLIC
POST**



**CLIC
UP POST**

COLOURS



Nero RAL 9005
Black RAL 9005
Noir RAL 9005



Dark Grey RAL 7021
Dark Grey RAL 7021
Gris Foncé RAL 7021




Corten
Corten
Corten



Verde RAL 6003
Green RAL 6003
Vert RAL 6003

CLIC GARDEN


IP 65 IK 06 1J xx3 CE UK CA	LED			COL.	CODE	*
	W	LM	REAL LM			
5	600	362	AC DIRECT		LL14803B	<input type="checkbox"/>
					LL14803D	<input type="checkbox"/>
					LL14803K	<input type="checkbox"/>
					LL14803V	<input type="checkbox"/>
LAMP			COL.	CODE	*	
ATT	LAMP MAX	CFL				
GU10	1 x 7 (LED)			LU14803B	<input type="checkbox"/>	
				LU14803K	<input type="checkbox"/>	

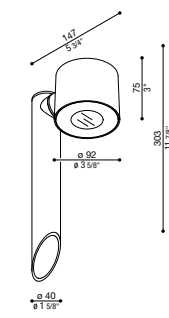

* Complete the CODE LED COLOUR N | 4000 K 2 | 2700 K - lm -5% 3 | 3000 K - lm -5%

CLIC UP GARDEN


IP 65 IK 06 1J xx3 CE UK CA	LED			COL.	CODE	*
	W	LM	REAL LM			
5	600	330	AC DIRECT		LL14813B	<input type="checkbox"/>
					LL14813D	<input type="checkbox"/>
					LL14813K	<input type="checkbox"/>
					LL14813V	<input type="checkbox"/>
LAMP			COL.	CODE	*	
ATT	LAMP MAX	CFL				
GU10	1 x 7 (LED)			LU14813B	<input type="checkbox"/>	
				LU14813K	<input type="checkbox"/>	

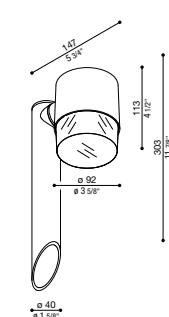

* Complete the CODE LED COLOUR N | 4000 K 2 | 2700 K - lm -5% 3 | 3000 K - lm -5%

CLIC POST


IP 65 IK 06 1J xx3 CE UK CA	LED			COL.	CODE	*
	W	LM	REAL LM			
5	600	362	AC DIRECT		LL14804B	<input type="checkbox"/>
					LL14804D	<input type="checkbox"/>
					LL14804K	<input type="checkbox"/>
LAMP			COL.	CODE	*	
ATT	LAMP MAX	CFL				
GU10	1 x 7 (LED)			LU14804B	<input type="checkbox"/>	
				LU14804K	<input type="checkbox"/>	



* Complete the CODE LED COLOUR N | 4000 K 2 | 2700 K - lm -5% 3 | 3000 K - lm -5%

CLIC UP POST

IP 65 IK 06 1J xx3 CE UK CA	LED			COL.	CODE	*
	W	LM	REAL LM			
5	600	330	AC DIRECT		LL14814B	<input type="checkbox"/>
					LL14814D	<input type="checkbox"/>
					LL14814K	<input type="checkbox"/>
LAMP			COL.	CODE	*	
ATT	LAMP MAX	CFL				
GU10	1 x 7 (LED)			LU14814B	<input type="checkbox"/>	
				LU14814K	<input type="checkbox"/>	

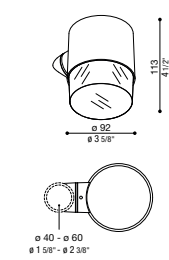

* Complete the CODE LED COLOUR N | 4000 K 2 | 2700 K - lm -5% 3 | 3000 K - lm -5%

CLIC GARDEN




CLIC GARDEN

CLIC POST



CLIC UP POST

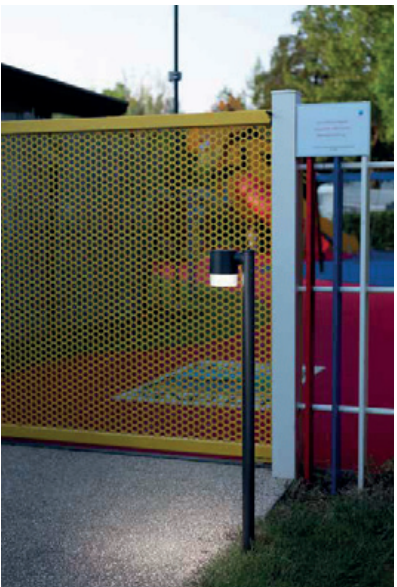


KIT CLIC | POST

Installazione Installation Installation	Terra. Ground. Sol.
Materiali Materials Materiels	Corpo in policarbonato, diffusore in policarbonato. Polycarbonate body, polycarbonate diffuser. Corps en polycarbonate, diffuseur en polycarbonate.
Alimentazione Power supply Alimentation	LED AC-Direct, lampadina GU10 (non inclusa). LED AC-Direct, GU10 light bulb (not included). LED AC-Direct, ampoule GU10 (pas inclus).
Versioni Versions Versions	Dimmerabile a taglio di fase. Phase cut dimmable. Réglable coupe de phase.



COLOURS



KIT CLIC POST 40 H1000

		LED						
IP 65 IK 06 1J xx3	W	LM	REAL LM	COL.	CODE	*		
	5	600	362	 AC DIRECT		LL14805B	<input type="checkbox"/>	
						LL14805D	<input type="checkbox"/>	
						LL14805K	<input type="checkbox"/>	
		LAMP						
ATT	LAMP MAX	CFL			COL.	CODE	*	
GU10	1 x 7 (LED)					LU14805B	<input type="checkbox"/>	
						LU14805K	<input type="checkbox"/>	

* Complete the CODE LED COLOUR N | 4000 K 2 | 2700 K - lm -5% 3 | 3000 K - lm -5%

KIT CLIC UP POST 40 H1000

		LED						
IP 65 IK 06 1J xx3	W	LM	REAL LM	COL.	CODE	*		
	5	600	330	 AC DIRECT		LL14815B	<input type="checkbox"/>	
						LL14815D	<input type="checkbox"/>	
						LL14815K	<input type="checkbox"/>	
		LAMP						
ATT	LAMP MAX	CFL			COL.	CODE	*	
GU10	1 x 7 (LED)					LU14815B	<input type="checkbox"/>	
						LU14815K	<input type="checkbox"/>	

* Complete the CODE LED COLOUR N | 4000 K 2 | 2700 K - lm -5% 3 | 3000 K - lm -5%

KIT CLIC | POST

KIT CLIC POST 40 H1500

IP 65 IK 06 1J xx3		LED			LAMP				
W	LM	REAL LM	COL.	CODE	ATT	LAMP MAX	CFL		
5	600	362		LL14806B	AC DIRECT	1 x 7 (LED)			LU14806B
				LL14806D					LU14806D
				LL14806K					LU14806K
* Complete the CODE		<input type="checkbox"/> LED COLOUR	N 4000 K 2 2700 K - lm -5% 3 3000 K - lm -5%						

KIT CLIC UP POST 40 H 1500

IP 65 IK 06 1J xx3		LED			LAMP				
W	LM	REAL LM	COL.	CODE	ATT	LAMP MAX	CFL		
5	600	330		LL14816B	AC DIRECT	1 x 7 (LED)			LU14816B
				LL14816D					LU14816D
				LL14816K					LU14816K
* Complete the CODE		<input type="checkbox"/> LED COLOUR	N 4000 K 2 2700 K - lm -5% 3 3000 K - lm -5%						

Accessori | Accessories

Forty

Palo diametro 40 mm in Bayblend fornito con tappo per la chiusura superiore. Staffa per il fissaggio a terra non inclusa.		H 1000 mm		
COL.	CODE	COL.	CODE	
	LB148001B		LB148001B	
	LB148001D		LB148001D	
	LB148001K		LB148001K	
40 mm Bayblend pole supplied with top cap. Ground fixing base not included.		Poteau de 40 mm en Bayblend fourni avec un couvercle supérieur. Le base de fixation au sol n'est pas inclus.		
H 1500 mm		H 1500 mm		
COL.	CODE	COL.	CODE	
	LB148002B		LB148002B	
	LB148002D		LB148002D	
	LB148002K		LB148002K	

Staffa Palo Forty

Staffa per il fissaggio del Palo Forty fuori terra.		CODE	
Forty Post fixing base Base for ground installation.		LB1480001	
Base de fixation du poteau Forty Base pour fixer le poteau Forty au sol.			









































Morsettiera coassiale


Morsettiera coassiale a 3 poli, IP68, per cavo per cavo ø 7/12 mm.		CODE	
Coaxial Terminal block Coaxial 3-pole terminal block, IP68, for cable diameter 7/12 mm.		LB11293	
Bornier coaxial Bornier coaxial à 3 pôles, IP68, pour câble diam. 7/12 mm.			

Morsettiera a tre vie

Morsettiera lineare a 3 vie a 3 poli, IP68, per cavo ø 7/13,5 mm.		CODE	
3 way linear terminal block 3-way 3-pole linear terminal block, IP68, for cable Ø 7/13.5 mm.		LB11294	
Bornier linéaire 3 voies Bornier linéaire 3 voies à 3 pôles, IP68, pour câble diam. 7/13,5 mm.			

Palo Still

Palo diametro 60 mm in Bayblend senza basamento. Possibilità di installazione con o senza basamento. Anima interno palo in acciaio zincato per altezze da 2000 mm.	H 1600 mm		H 500 mm		H 1000 mm	
	COL.	CODE	COL.	CODE	COL.	CODE
	LB11033		LB11112		LB1100012	
	LB1103G		LB1111G		LB110001G	
	LB1103G		LB1111E		LB110001E	
	LB1103K		LB1111K		LB110001K	
	LB11031		LB11111		LB110001W	
Still 60 mm Bayblend pole without base. Possibility of installation with or without base. Galvanized steel inner pole from H 2000 mm.	H 1500 mm		H 2000 mm		H 2500 mm	
	COL.	CODE	COL.	CODE	COL.	CODE
	LB1100022		LB1100032		LB1100042	
	LB110002G		LB110003G		LB110004G	
	LB110002E		LB110003E		LB110004E	
	LB110002K		LB110003K		LB110004K	
	LB1100021		LB1100031		LB1100041	
Still 60 mm Bayblend pole without base. Possibility of installation with or without base. Galvanized steel inner pole from H 2000 mm.	H 3000 mm		H 3500 mm			
	COL.	CODE	COL.	CODE		
	LB1100052		LB1100062			
	LB110005G		LB110006G			
	LB110005E		LB110006E			
	LB110005K		LB110006K			
	LB1100051		LB1100061			




Piastra base a scomparsa palo Still

Soluzione alternativa al tradizionale interrimento o al basamento palo still mediante staffa di fissaggio a scomparsa. Consiste nell'inserire il palo still sulla staffa preforata da 3 mm, realizzata in ferro zincato a caldo per immersione. Accessorio non idoneo per pali still superiori a h. 1500.

Retractable plate base
Alternative solution to the usual burial or to the post base using a retractable fixing bracket.
The post is inserted in the 3 mm pre-drilled bracket made of hot-dip zinc-coated metal.
Accessory not suitable for posts higher than 1500 mm.

Plaque de base rétractable
Solution alternative à l'enfouissement traditionnel ou mise en place moyennant un étrier de fixation rétractable du pieu post. Insérer le poteau Still sur l'étrier pré-percé de 3 mm, réalisé en fer galvanisé à chaud par immersion.
Accessoire ne convenant pas à des poteaux Still de plus de 1500 mm de haut.

CODE
LB1130006









Basamento palo Still Ø170 mm

Basamento in nylon-fibra di vetro per palo diametro 60 mm.

Base Ø170 mm for Still post
Base in fibre glass-nylon for post diameter 60 mm.

Socle Ø170 mm pour poteau Still
Socles en fibre de verre - nylon pour poteau diam. 60 mm

COL.	CODE
	LB11812
	LB1181G
	LB1181E
	LB1181K
	LB11811








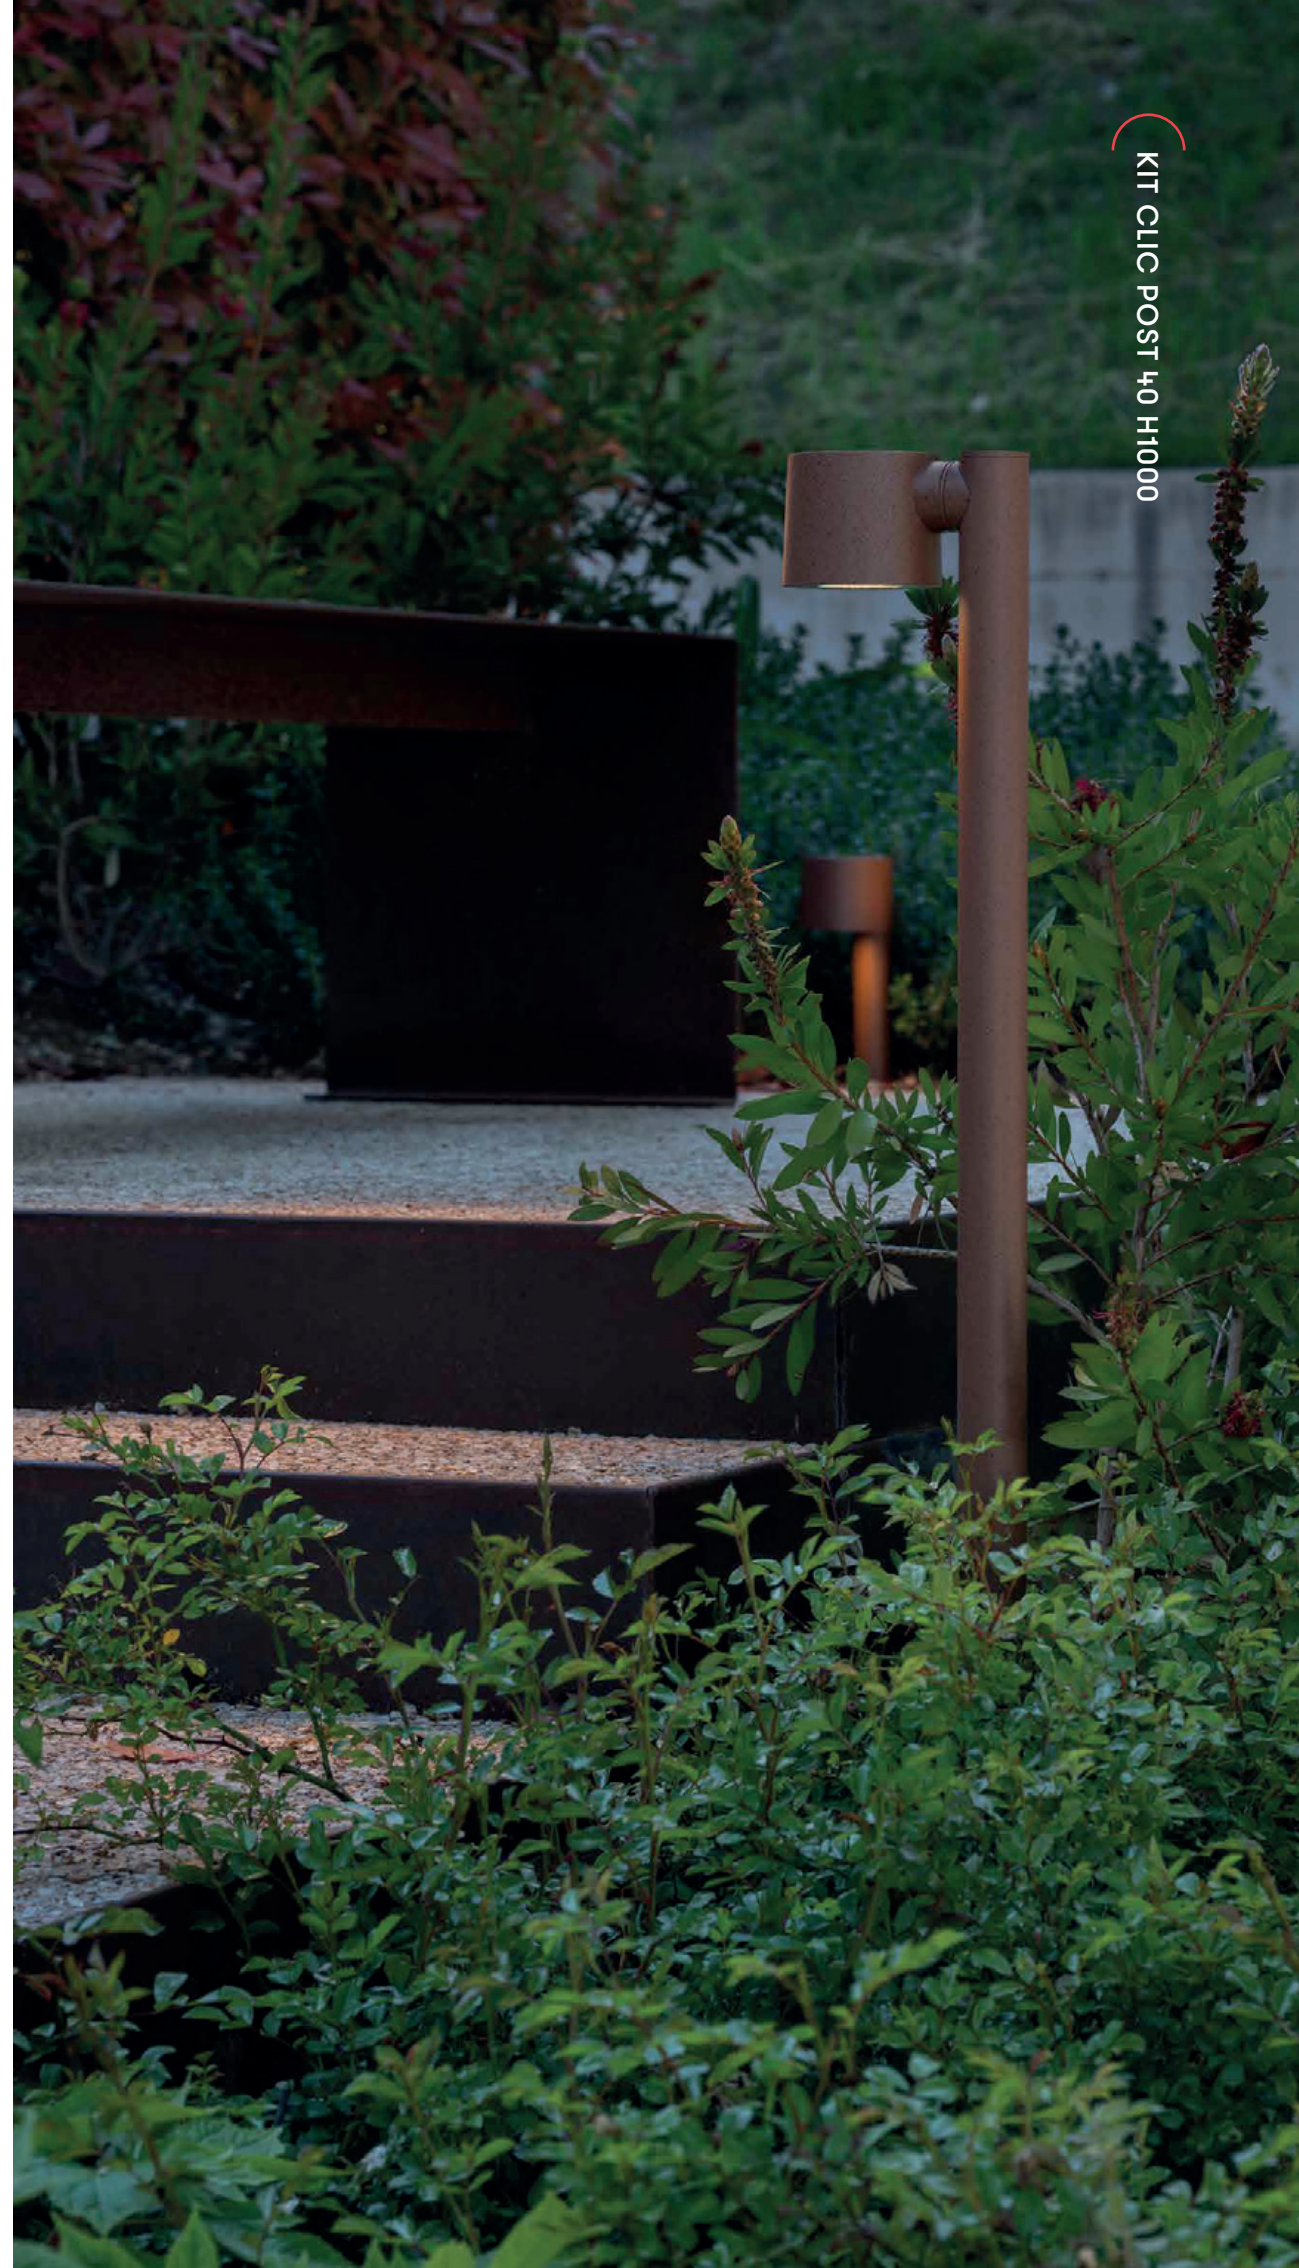

Tappo palo Still

Tappo in polietilene.

Cap for Post Still
Polyethylene cap.

Couvercle Poteau Still
Couvercle en polyéthylène.

COL.	CODE
	LB1100082
	LB110008G
	LB110008E
	LB110008K
	LB1100081





HOW TO


Diffusore trasparente, diffusore UP opale.
Transparent diffuser, opal diffuser (UP version).
Diffuseur transparent, diffuseur opale (version UP).



LED AC-Direct
LED AC-Direct.
LED AC-Direct.



Rotazione 360°
360° rotation.
Rotation de 360°.

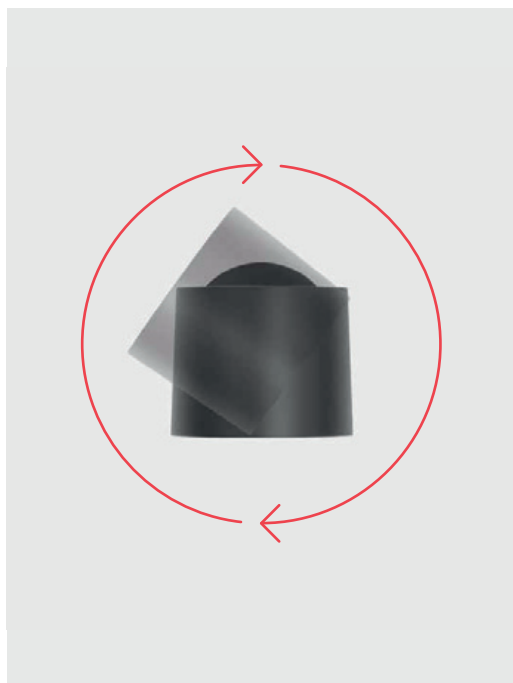

Installazione Clic Wall con e senza base.
Clic Wall installation with and without base.
Installation Clic Wall avec et sans base.



Lampadina GU10 (non inclusa).
GU10 light bulb (not included).
Ampoule GU10 (pas inclus).





Lombardo.

EVERYDAY LIGHT

Via Pizzigoni 3 • Villongo (BG) • 24060 • Italy
T +39 035 939 411 • F +39 035 939 496
info@lombardo.it

lombardo.it